


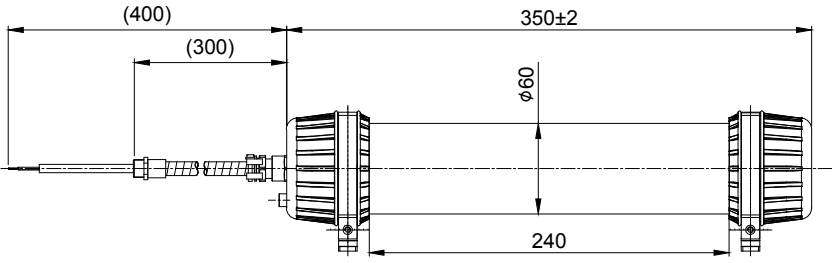


MARK	DATE	REVISION	REVISER	APP .BY
△1				
△2				
△3				

MODEL NO		QLEX-350-24		
MATERIAL		HOUSING (SIDE COVER) - AL		
		HOUSING (PACKING COVER OUT) - NBR		
		LENS (GLOBE) - PC		
COLOR OF LENS		CLEAR		
USE VOLT.	CURRENT	DC24V	MAX. 0.36A	
PROTECTION GRADE		Ex d IIC T6 IP66/IP67		
CABLE ENTRY		M12 OR 20 OR 25 OR NPT1/2 OR 3/4 OR PF 1/2 OR 3/4		

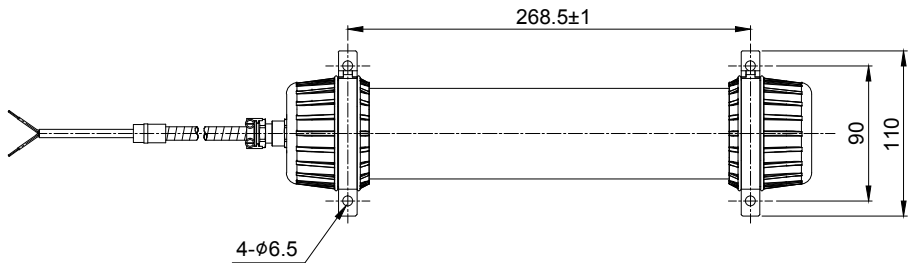

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	
	3~6			±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10		±1°	±1°30'	±3°	
	10~50		±0°30'	±1°	±2°	
	50~120		±0°20'	±0°30'	±1°	
	120~400		±0°10'	±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
J.Y. KIM	Y.H. JOO		J.K. HAN	3	2018.02.05	
TITLE			MODEL			
QLEX-350 LAYOUT			QLEX SERISE			
			DWG. NO.		QLEX LAYOUT	
			SCALE	SIZE	REV	SHEET
N/S	A4	00	1/1			